

PASTILO CCT

SLI042002CCT_PW


LED luminaire PASTILO CCT with the possibility of changing the light color (CCT), with a power of 15 W, high light efficacy 120 lm/W. Thanks to the ability to change the color temperature (CCT) in the range from 3000K to 6000K, we can adjust the light color depending on our needs and preferences. It has a high IP54 rating, making it ideal for use in rooms with high humidity. IK10 class provides impact resistance. Designed for surface mounting.



Power	15 W	Voltage	230 V
Luminous flux*	1800 lm (360°)	Colour temperature	2700/4000/6000 K
Colour of light	CCT	Beam angle	120 °
IK	10	Degree of protection (IP)	IP54


Technical data

Code	SLI042002CCT_PW
Power	15 W
Nominal current	120 mA
Voltage	230 V
Energy consumption	15 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power factor	0.5
Useful luminous flux*	1800 lm (360°)
Luminous flux**	1650 lm (360°)
Lamp efficacy	120 lm/W
Colour temperature	2700/4000/6000 K
Colour of light	CCT
Beam angle	120 °
RA	80
Light source included	+
Dimmable	No
Working temperature range	-20/+40 °
Lifespan	17000 h
Housing material	Plastic
IK	10
Degree of protection (IP)	IP54
Colour	White
Dimension (AxBxC)	266x137x47 mm
For use	Inside/Outside
Assembly method	On the ceiling
Application	INT/EXT
Made in	PRC
Other	Light color change function 2700K/4000K/6000K ,

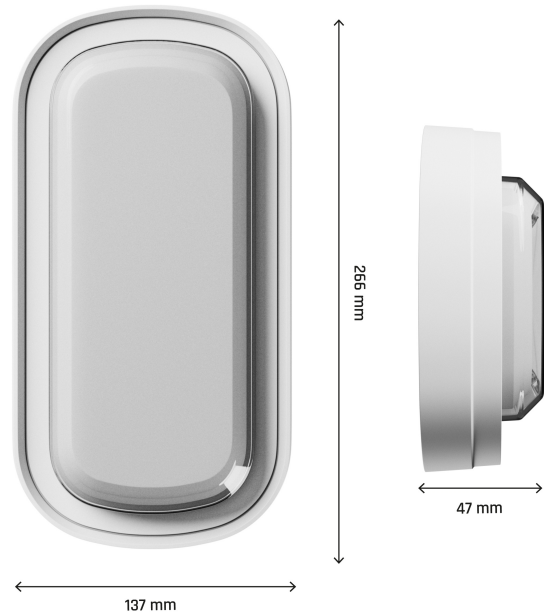


Related documents



 User manual



 Declaration of Conformity

