

INSTALLATION INSTRUCTION TOUCH DIMMER

TECHNICAL DATA:

MODEL	VT-2440
INPUT VOLTAGE	3V (AAA x 2PCS) (BATTERY NOT INCLUDED)
TRANSMISSION POWER	6dBm
STANDBY POWER CONSUMPTION	20μA
MODULATION METHOD	GFSK
DIMENSION	∅80x12mm



INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 2 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.

WARNING!

1. Please make sure to turn off the power before starting the installation.
2. Installation should only be done by a certified electrician.
3. For Indoor use only
4. In the using of the remote, if the indicated lamp blinking quickly, please change the battery in time. Please don't use poor quality battery to avoid the leaking of battery liquid to damage the remote.
5. This product is precise electronic product; don't use it in humid, high temperature, dust and high voltage environment; Saving it at indoor, dry and no static electricity environment.
6. Please don't use the remote on the wide-range metal or strong electromagnetic wave area, otherwise, it will badly affect the controlling distance.



This marking indicates that this product should not be disposed of with other household wastes.




Caution, risk of electric shock.



MULTI-LANGUAGE MANUAL QR CODE

Please scan the QR code to access the manual in multiple languages.

PRODUCT KEY DIAGRAM




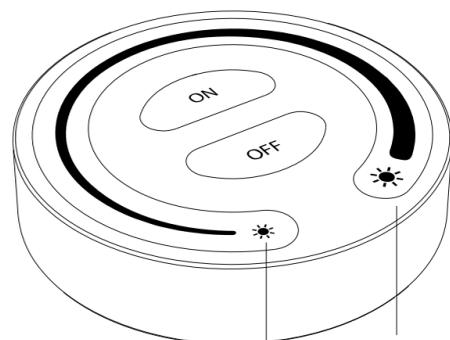


1% Brightness 100% Brightness

OFF: Short press to turn off the light;
Long press to night light mode.

Dimming Slider: Toucg adjust 1~100%
brightness.

INSTALLATION DIAGRAM

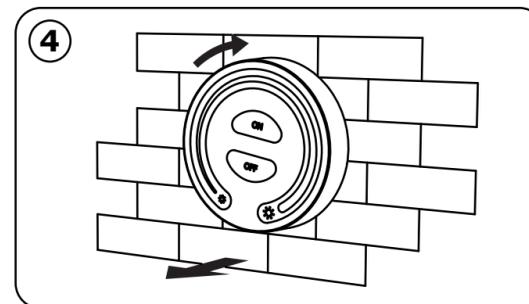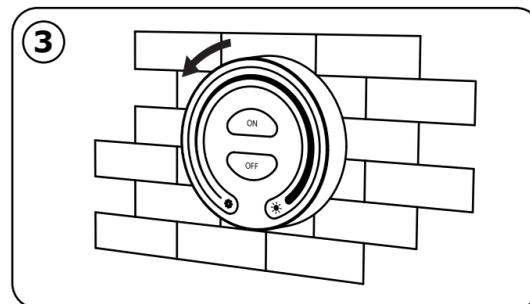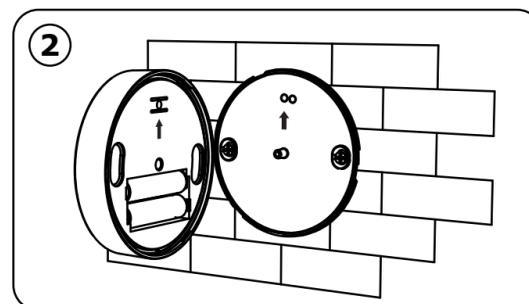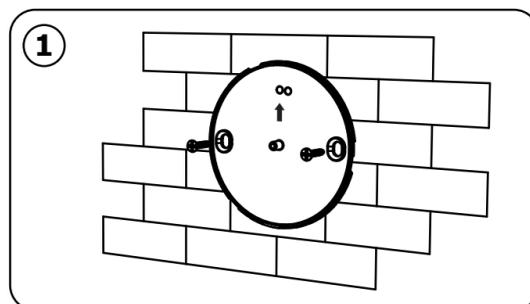

INSTALLATION INSTRUCTION

1. Install the remote to the selected place; Keep the two screw on the same level; Install it with arrow up.
2. Install battery (AAA Battery x 2PCS), then fix it on the base.
3. Press downward and rotate to the left to fix it
4. Dismantling: Rotate to the right, then plunk it down.

LINKING INSTRUCTIONS

1. Switch off the light, after 10 seconds switch on again.
2. When the light on, short press press " ON " 3 times within 3 seconds.
3. The light blink 3 times slowly means the linking is done successfully.

Note: If the light not blink slowly, the linking failed, Pls switch off the light again, and follow the above steps again.


UNLINKING INSTRUCTIONS

1. Switch off the light, after 10 seconds switch on again.
2. When the light on, short press " ON " 5 times within 3 seconds.
3. The light blinking 10 times quickly, means the unlinking successfully.

Note: If the light not blink quickly, the unlink failed, pls switch off the light again, and follow the above steps to unlink again.

COMPATIBLE DEVICES

Compatible with the below devices
(Not included; available to buy separately)

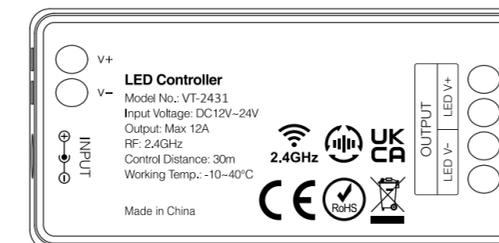

(SKU: 2911
VT-2431)
(NOT INCLUDED)



IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT: SUPPORT@V-TAC.EU
FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST
DEALERS. V-TAC EUROPE LTD. BULGARIA, PLOVDIV 4000, BUL.L.KARAVELOW 9B