




Meaningful Innovation.

INSTRUCTION MANUAL

LED BORDERLINE PANEL

TECHNICAL DATA

MODEL	VT-6172
SKU	24217
SHAPE	SQUARE
WATTS	72 W
LUMEN [USEFUL LUMEN]	7200 Lm
BEAM ANGLE	110°
CRI	≥80
DF	≥0.9
LIFE SPAN	30,000 Hours
ON/OFF CYCLE	>15,000 Times
OPERATING TEMPERATURE	-20°C to +40°C
INPUT VOLTAGE	DC: 28-42V
IP RATING	IP20
BODY TYPE	Aluminium+ PC
DIMENSION	595×595×15mm

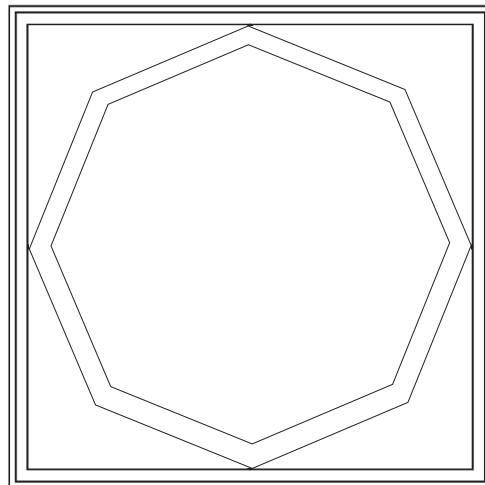

05 YEAR
WARRANTY*

LIFUD[®]
Driver

Super Bright
100
LUMENS/W

INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 2 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.



This marking indicates that this product should not be disposed of with other household wastes.



Caution, risk of electric shock.





MULTI-LANGUAGE MANUAL QR CODE

Please scan the QR code to access the manual in multiple languages.

WARNING

1. Please make sure to turn off the power before starting the installation.
2. Installation should only be done by a certified electrician.
3. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
4. The servicing of the control gear in this luminaire should only be undertaken by the manufacturer or their service agent or a similarly skilled person.
5. The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the whole luminaire shall be replaced.
6. For Indoor use only.

Note: The panel works on DC 28-42 V, please connect correctly with the conductor before connecting the conductor to the power supply main.

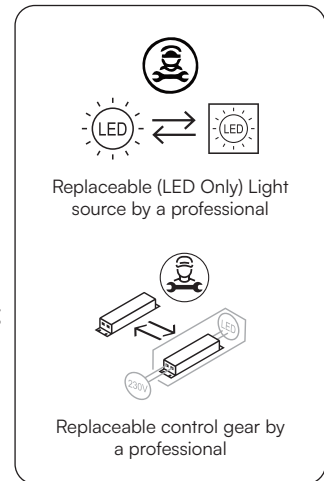

Luminaires not suitable for covering with thermally insulating material.



FR
Cet appareil, ses accessoires et câbles se recyclent

À DÉPOSER EN MAGASIN




À DÉPOSER EN DÉCHÈTERIE



Points de collecte sur www.quefairedemesdechets.fr
Privilégiez la réparation ou le don de votre appareil !


INSTALLATION INSTRUCTION

1

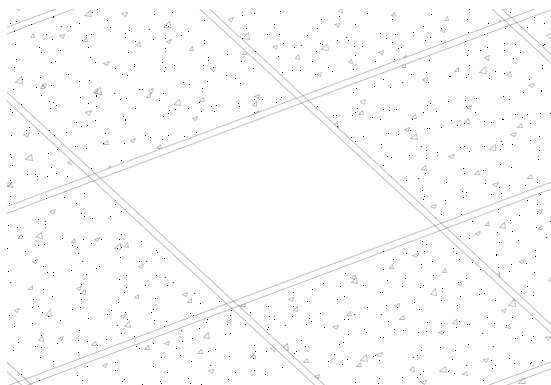


1. Make a hole into ceiling

2

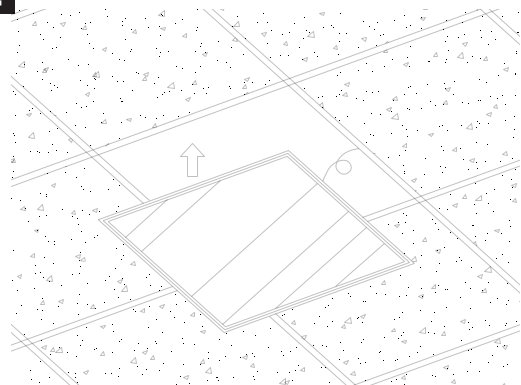


2. Fix the panel into ceiling.

3



3. Wire the DC cable of the panel to the driver and then wire the AC source cable to the power supply.


4

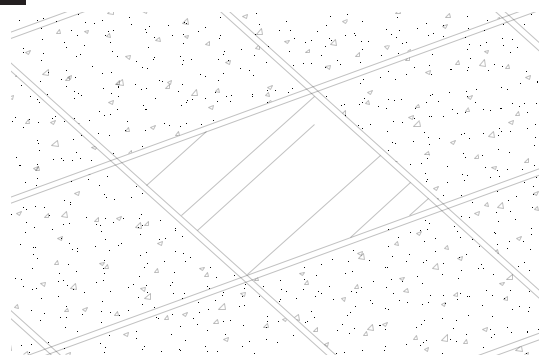

4. Turn on the switch, test the fixture light on.

DISMANTLING INSTRUCTIONS

For Market surveillance team only

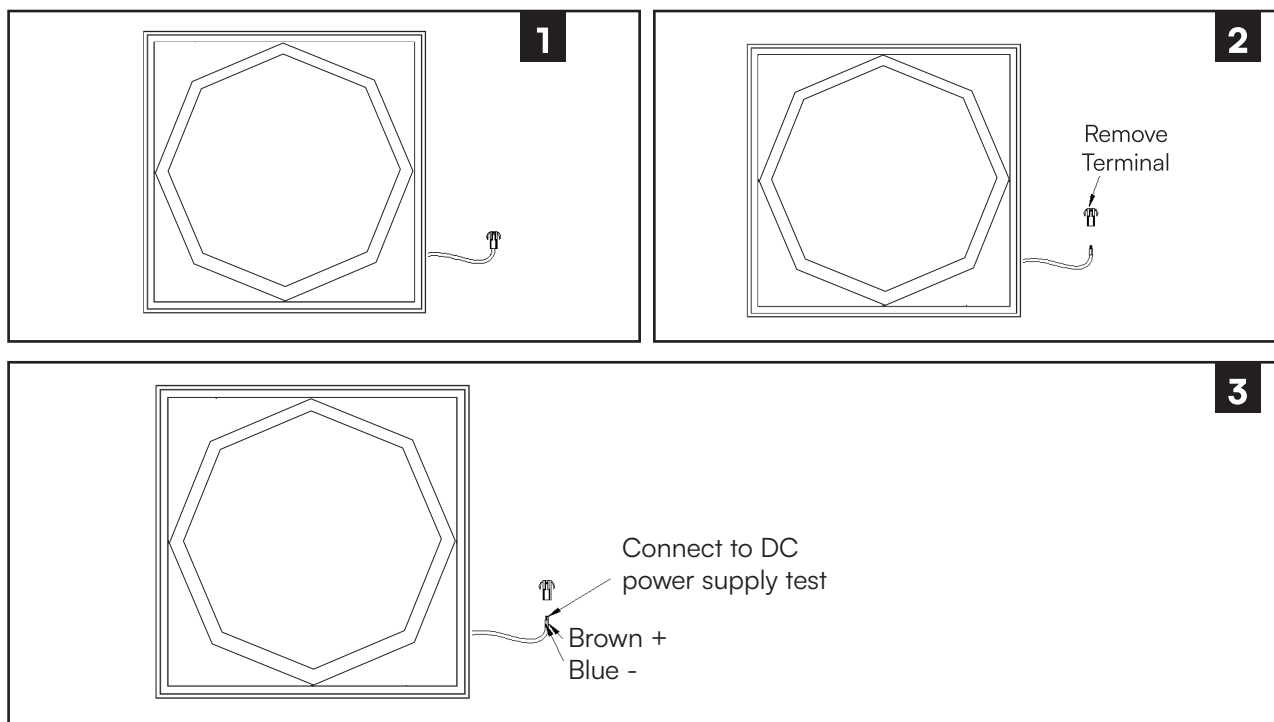

Note

- Light source removal will void the warranty.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



V-TAC WEST EUROPE LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT:
SUPPORT@V-TAC.EU FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST DEALERS.
V-TAC WEST EUROPE LTD. GROUND FLOOR, 71 LOWER BAGGOT STREET, DUBLIN 02, IRELAND DO2 P593

V-TAC UK LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT PLEASE REACH OUT TO US AT
SUPPORT@VTACEXPORTS.COM V-TAC, 5A TUNGSTEN PARK, DOWNS ROAD, WITNEY, OXFORDSHIRE, OX29 0AX